


# Platform scale KERN IFB

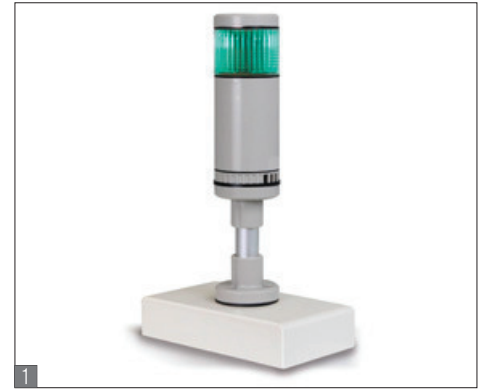

Accessories

## Platform scale with EC type approval [M]

### Features


- **Industrial quality:** because of its stable construction and robust design, it is ideal for continuous use in industrial applications
- **Benchtop stand incl. wall mount** for display device as standard
- **Level indicator and foot screws** to level the balance precisely, fitted as standard, to give the most accurate weighing results
- **Totalizing** of weights and counting operations

### Technical data

- Large backlit LCDdisplay, digit height 52 mm
- Dimensions of weighing plate (stainless steel) WxDxH
  - A 300x240x100 mm
  - B 400x300x128 mm
  - C 500x400x137 mm, see larger picture
  - D 650x500x142 mm
- Cable length of display device approx. 2,5 m
- Permissible ambient temperature -10 °C / 40 °C

- **Protective working cover** over the display device standard, can be reordered, KERN KFB-A02, € 30,-
- **Signal lamp** for visual support of weighing with tolerance range, must be ordered at purchase, WxDxH 100x180x300 mm, KERN CFS-A03, € 250,-
- **Stand** to elevate display device, height of stand approx. 330 mm, KERN IFB-A01, € 40,- height of stand approx. 600 mm, for models with weighing plate sizes C and D, KERN IFB-A02, € 50,-
- **Y cable**, RS-232, KERN CFS-A04, € 35,-
- **Rechargeable battery pack internal**, operating time approx. 35 h, charging time approx. 12 h, must be ordered at purchase, KERN KFB-A01, € 35,-
- **Suitable printers** see page 130

### STANDARD



only with printer

### OPTION



### FACTORY



Model	Weighing range [Max] kg	Read-out [d] g	Verific. value [e] g	Minimum load [Min] g	Net weight approx. kg	Weighing plate	Price excl. of VAT ex works €	Options			
								Verification		DKD Calibr. Certificate	
								M III KERN	€	DKD KERN	€
<b>Dual-range balance (D=Dual):</b> switches automatically to the next largest weighing range [Max] and readout [d].											
IFB 6K1DM	3   6	1   2	1   2	20	6	A	290,-	965-228	50,-	963-128	80,-
IFB 15K2DM	6   15	2   5	2   5	40	6	A	290,-	965-228	50,-	963-128	80,-
IFB 15K2DLM	6   15	2   5	2   5	40	10	B	350,-	965-228	50,-	963-128	80,-
IFB 30K5DM	15   30	5   10	5   10	100	10	B	350,-	965-228	50,-	963-128	80,-
IFB 60K10DM	30   60	10   20	10   20	200	10	B	350,-	965-229	75,-	963-129	95,-
IFB 60K10DLM	30   60	10   20	10   20	200	16	C	430,-	965-229	75,-	963-129	95,-
IFB 150K20DM	60   150	20   50	20   50	400	16	C	430,-	965-229	75,-	963-129	95,-
IFB 150K20DLM	60   150	20   50	20   50	400	22	D	570,-	965-229	75,-	963-129	95,-
IFB 300K50DM	150   300	50   100	50   100	1000	22	D	570,-	965-229	75,-	963-129	95,-

Note: For applications that require verification, please order verification at the same time, initial verification at a later date is not possible. Verification at the factory, we need to know the full address of the location of use.